

PUMPER BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

Velocity Chassis (Big Block)

CHASSIS AXLE, FRONT, CUSTOM
22,800 lb TAK-4 Axle

AXLE, REAR
24,000 lb Meritor Axle

ENGINE
500 HP Cummins X15 Engine

TRANSMISSION
Allison 5th Gen, 4000 EVS P

BUMPER
19" Extended Stainless Steel

CAB

7010 Velocity FR Cab

BODY WATER TANK

1000 Gallon New York Style Water Tank

COMPT, PUMPER, REAR
30.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE
171" RollUp Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE
171" RollUp Full Height Front & Rear FDLER

FIRE SUPPRESSION PUMPHOUSE

48" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity

SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

Foam System
Foam System Not Required


Foam Cell
Foam Cell Not Required

Side Roll and Frontal Impact Protection

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- 30A SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED IN DRIVER'S STEP AREA
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER'S STEP AREA
- BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
- BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER SEAT RISER WITH BRACKET
- FOUR ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
- TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
- ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER
- AUTOMATIC TIRE CHAINS

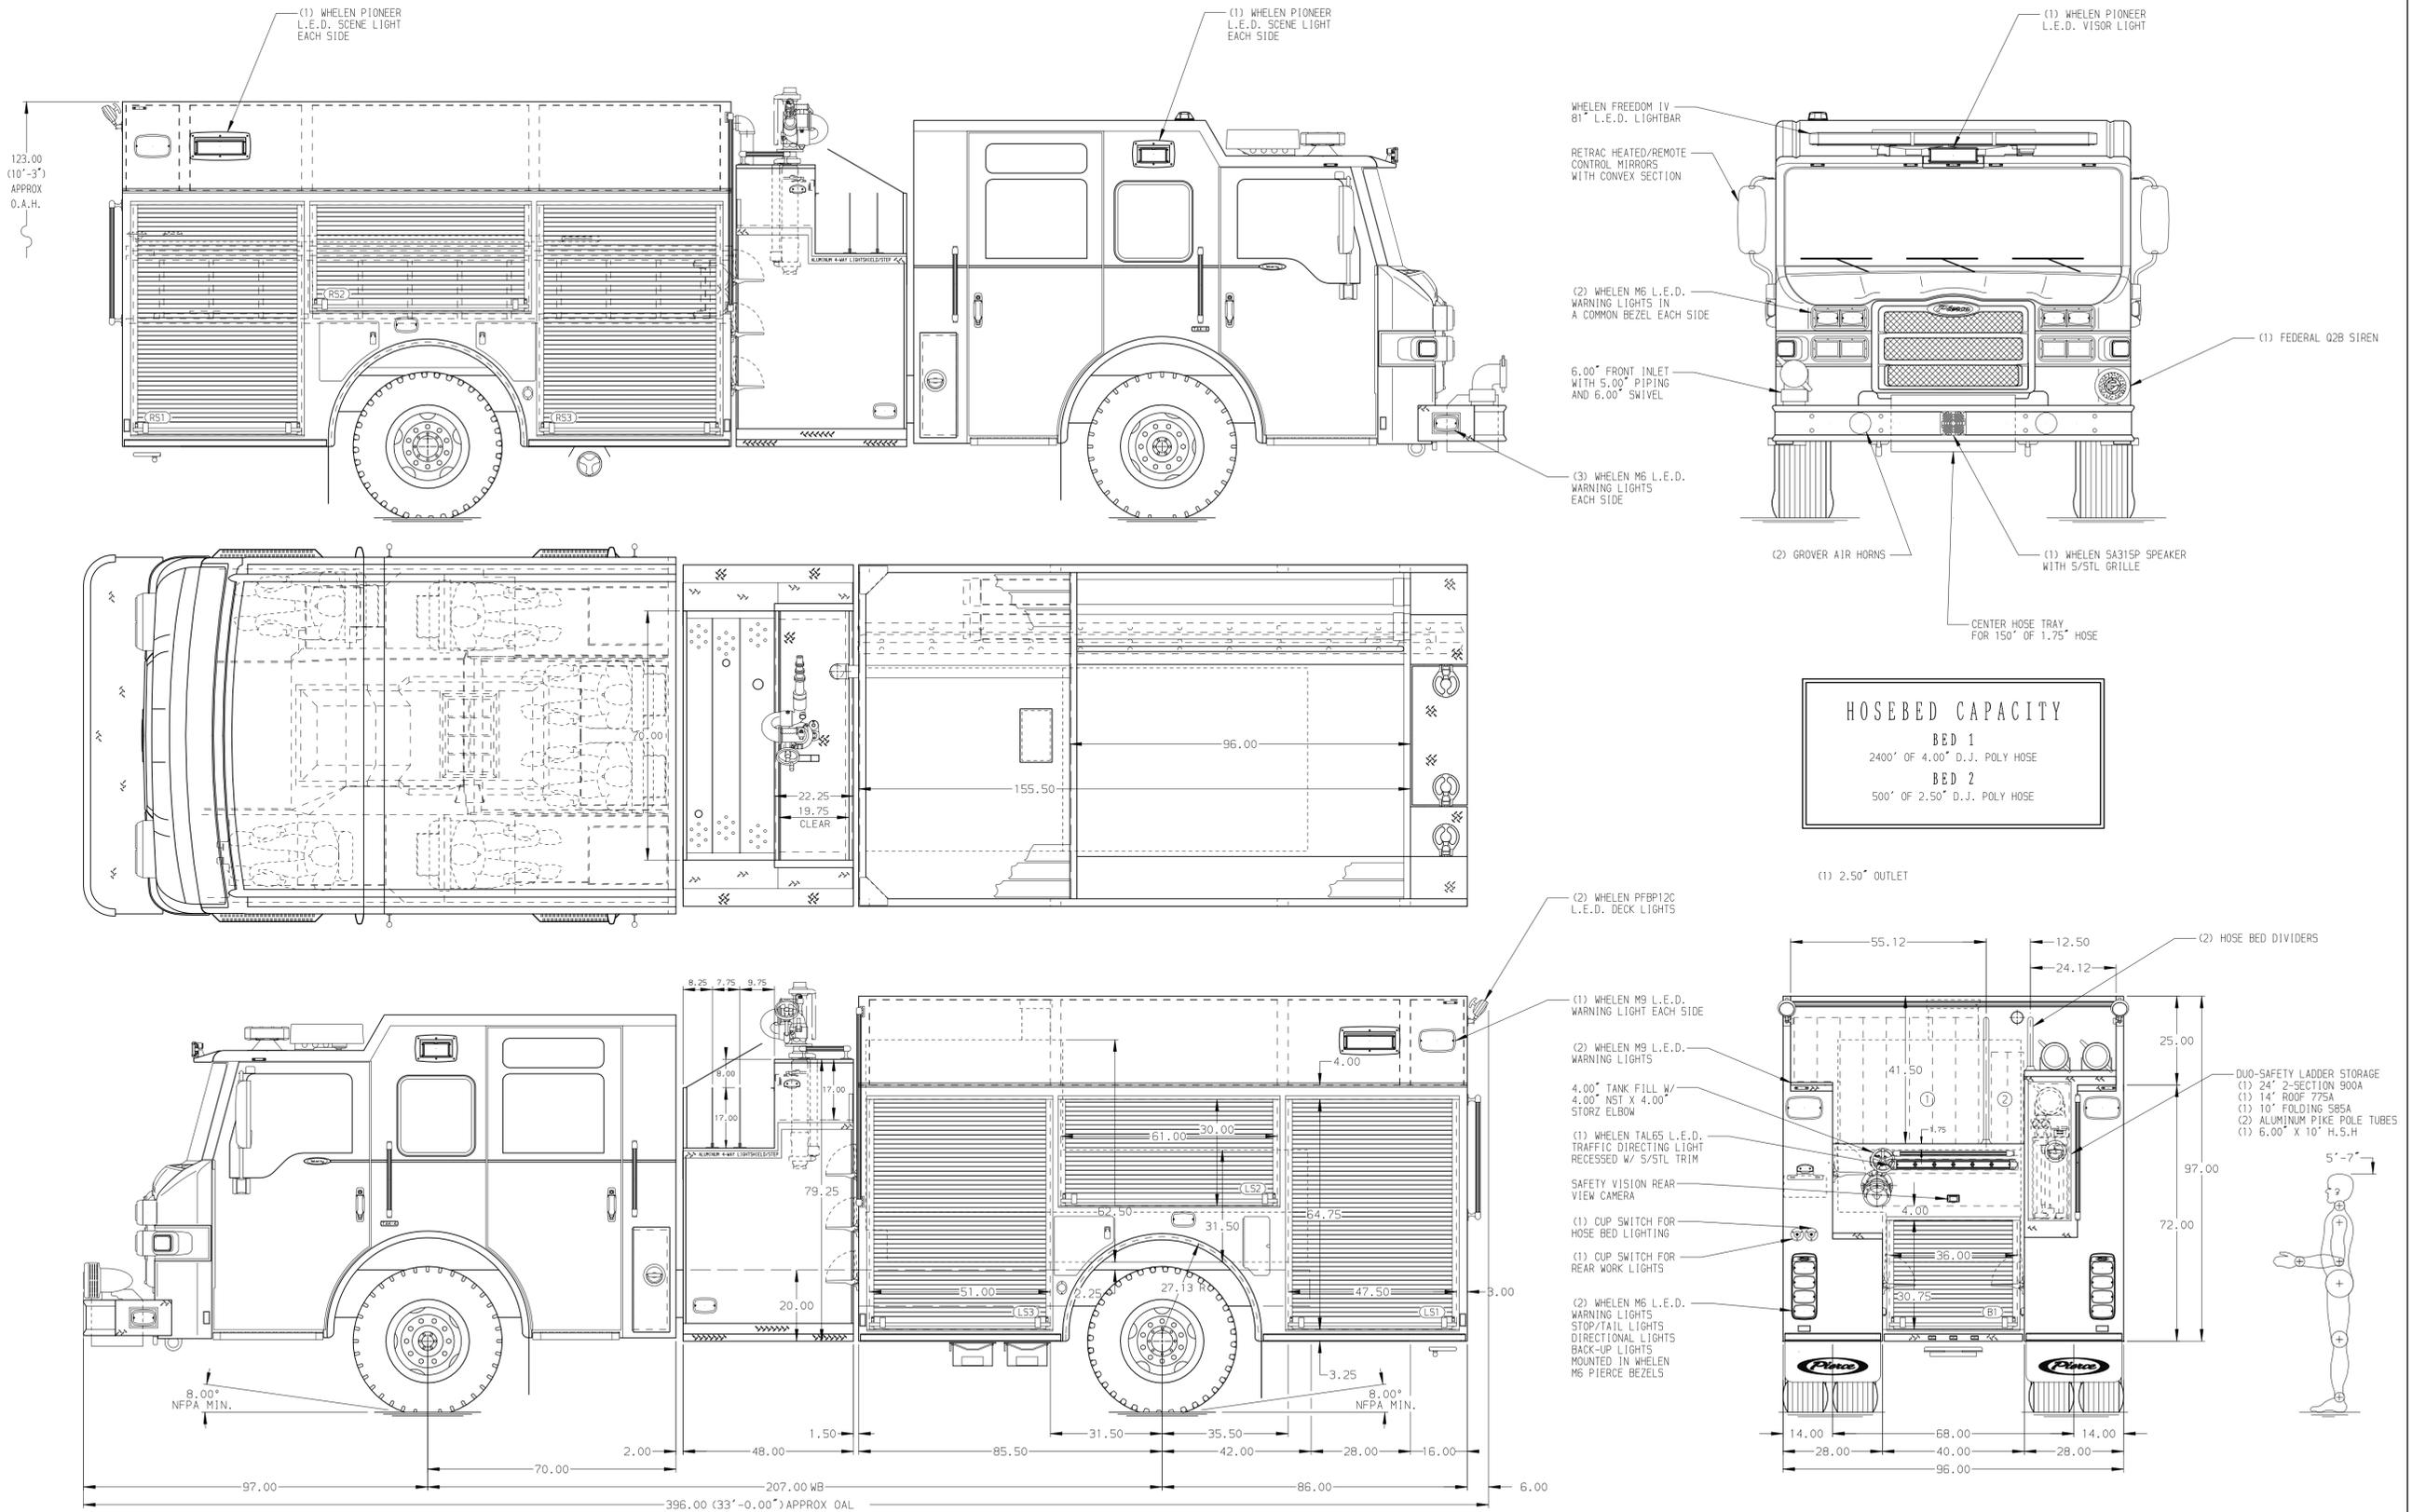

CUSTOMER APPROVAL

APPROVED BY: _____			
DATE: _____			
CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	
MAKE	FOR	Bolton Volunteer Fire Department	
PIERCE	DWG NO.	04-8714	
MODEL	VELOCITY		
REV	DATE	BY	CH

Pierce MANUFACTURING INC.

JOB NO.	PRELIM
SCALE	DATE
1:24	
DRAWN BY	CHEKED BY
COL	
SHEET SIZE	SHEET NO.
D	1 OF 1