
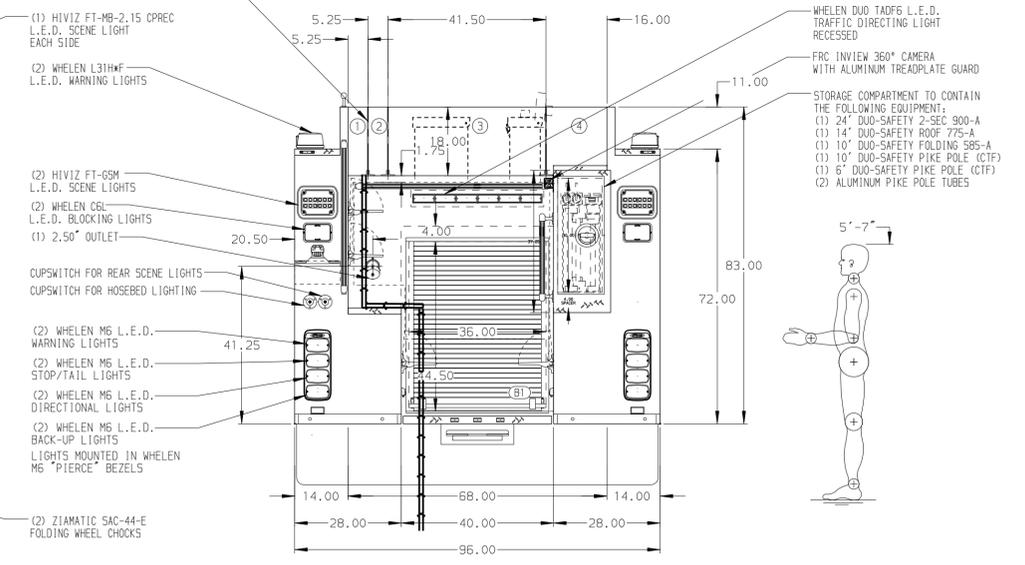


- HOSEBED CAPACITIES
- ① 200' OF 2.50" HOSE
  - ② 200' OF 2.50" HOSE
  - ③ 1200' OF 4.00" HOSE
  - ④ 500' OF 2.50" HOSE

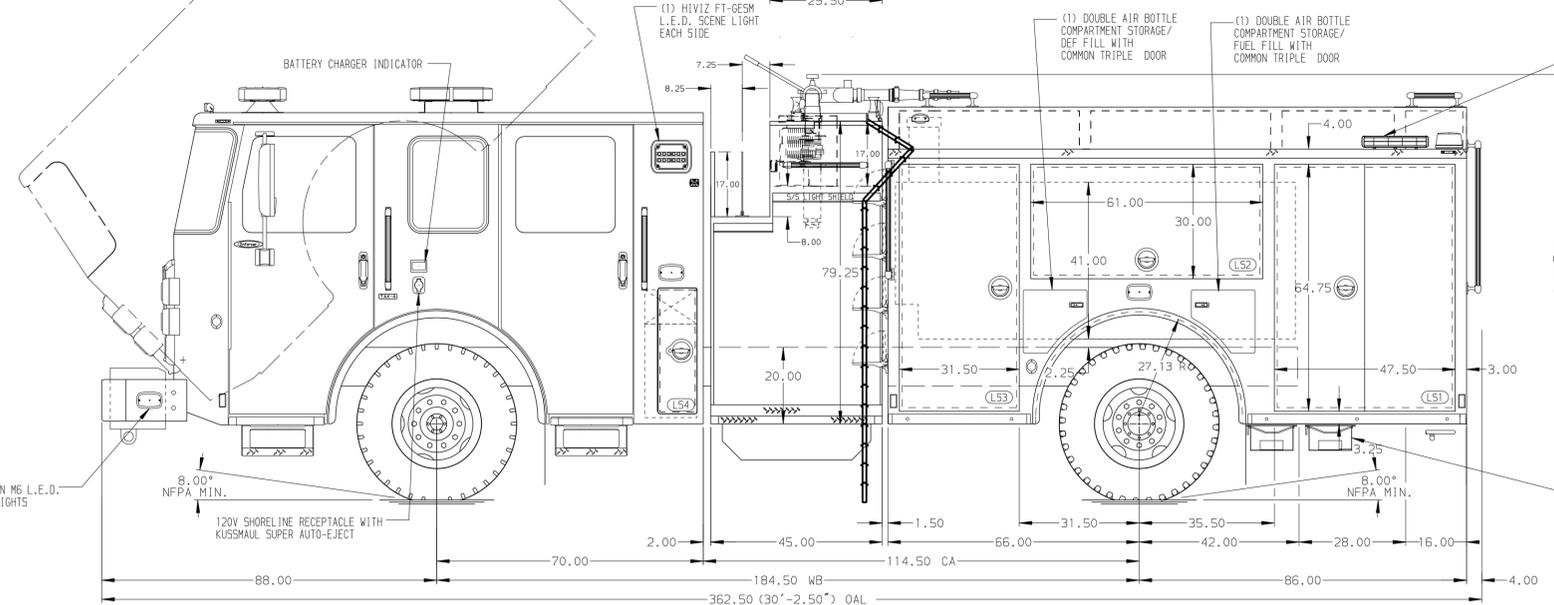

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

**NOTE**  
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. AIR INLET WITH DISCONNECT COUPLING ON D.S. STEP WELL
- 2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- 3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 4. TWO FULL WIDTH/DEPTH ADJUSTABLE SHELVES IN L51, L53, R51, AND R53
- 5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN L51, L53, R51, AND R53
- 6. SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN L52

REV	DATE	BY	CH	ENFORCER
10SEP20	LST	CSH		CHASSIS DATA
24AUG20	LST	CSH		MAKE
10AUG20	LST	CSH		PIERCE
21APR20	SHD	DTS		MODEL
12MAR20	LST	DTS		

		JOB NO.	34779
		SCALE	1:24
TITLE 1250-D-750P, 740 GAL OF WATER W/ 10 GAL FOAM CELL 152" FH FDLER, LDRS. BTWN TANK & S. SHEET, (2) X-LAYS	FOR FLANDERS FIRE DISTRICT FLANDERS, NEW YORK	DRAWN BY	LST
		CHECKED BY	CDU
DWG NO.	34779AD	SHEET SIZE	D
		SHEET NO.	1 OF 1