

**PUMPER
BODY**

Long Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

**CHASSIS
AXLE, FRONT, CUSTOM**

20,000 Lb Dana Axle

AXLE, REAR

27,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

ALLison 6th Gen, 3000 EVS P

BUMPER

19" Extended Stainless Steel

CAB

6010 Enforcer Cab

**BODY
WATER TANK**

1000 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

23.50" FF RoLup Rear Compt

COMPT, PUMPER, LEFT SIDE

171" RoLup Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE

171" RoLup Full Height Front & Rear FDLER

**FIRE SUPPRESSION
PUMPHOUSE**

45" Control Zone Side Mount

PUMP

1500 GPM Waterous QMAX-150

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

(1) 2.50" Standard Capacity

SPEEDLAYS

SpeedLays Not Required

GENERATOR



Generator Not Required

Foam System



Foam System Not Required

Foam Cell

Foam Cell Not Required

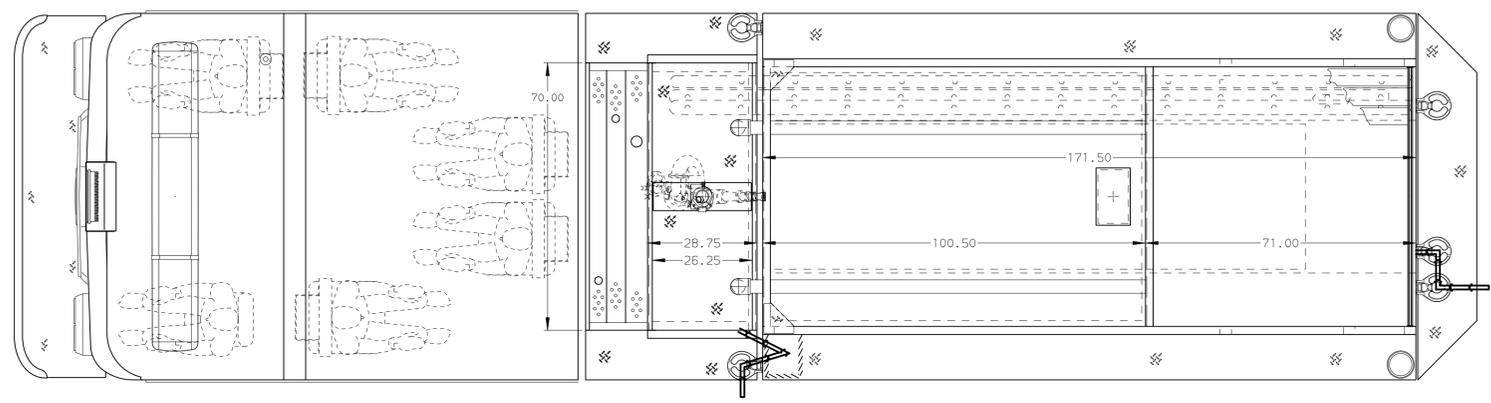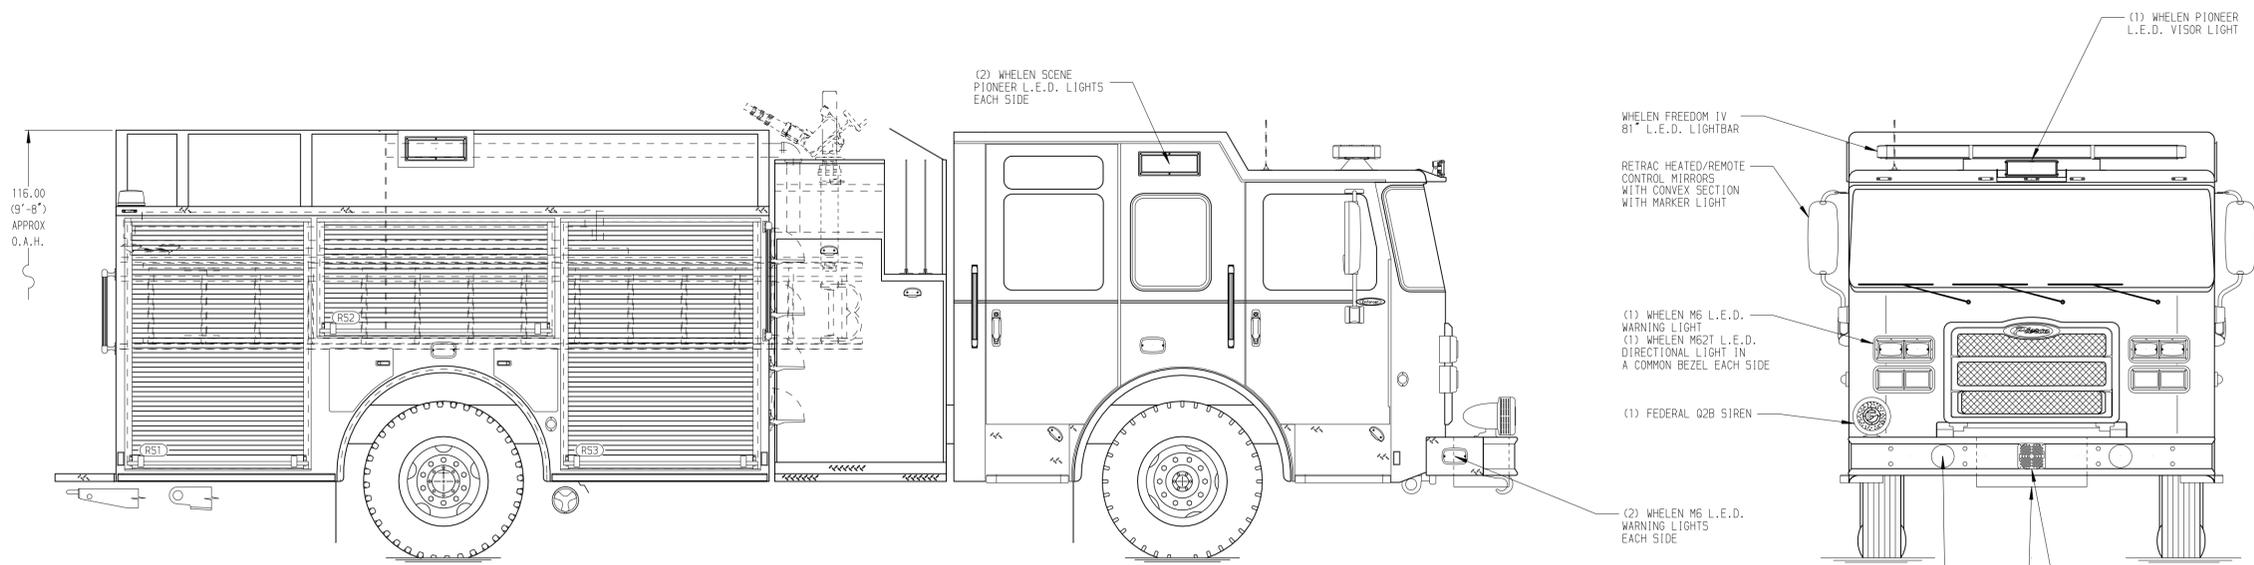

HOSEBED CAPACITY	
BED 1	300' OF 3.00" D.J. POLY HOSE
BED 2	1000' OF 5.00" D.J. POLY HOSE
BED 3	300' OF 3.00" D.J. POLY HOSE

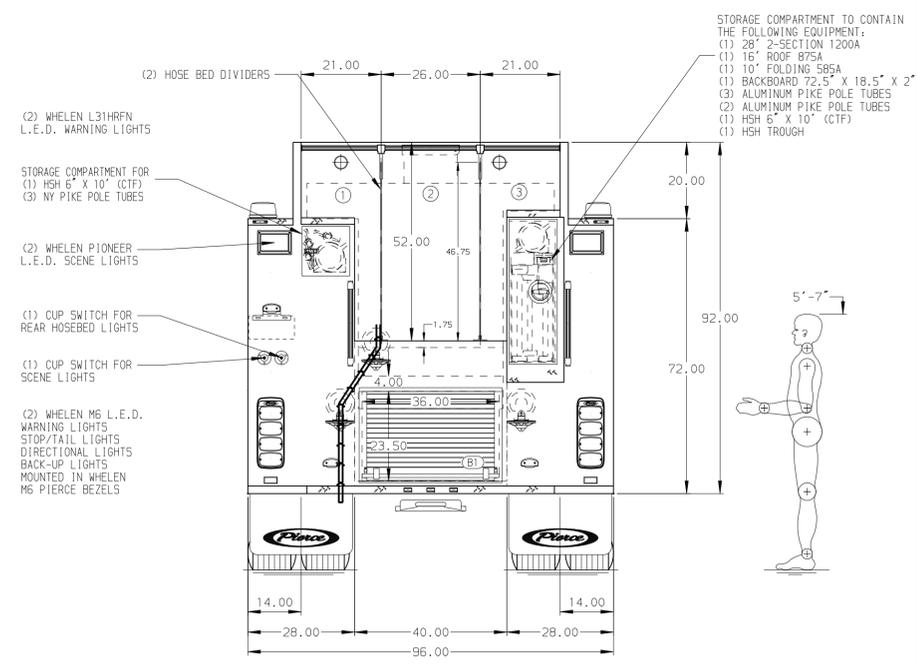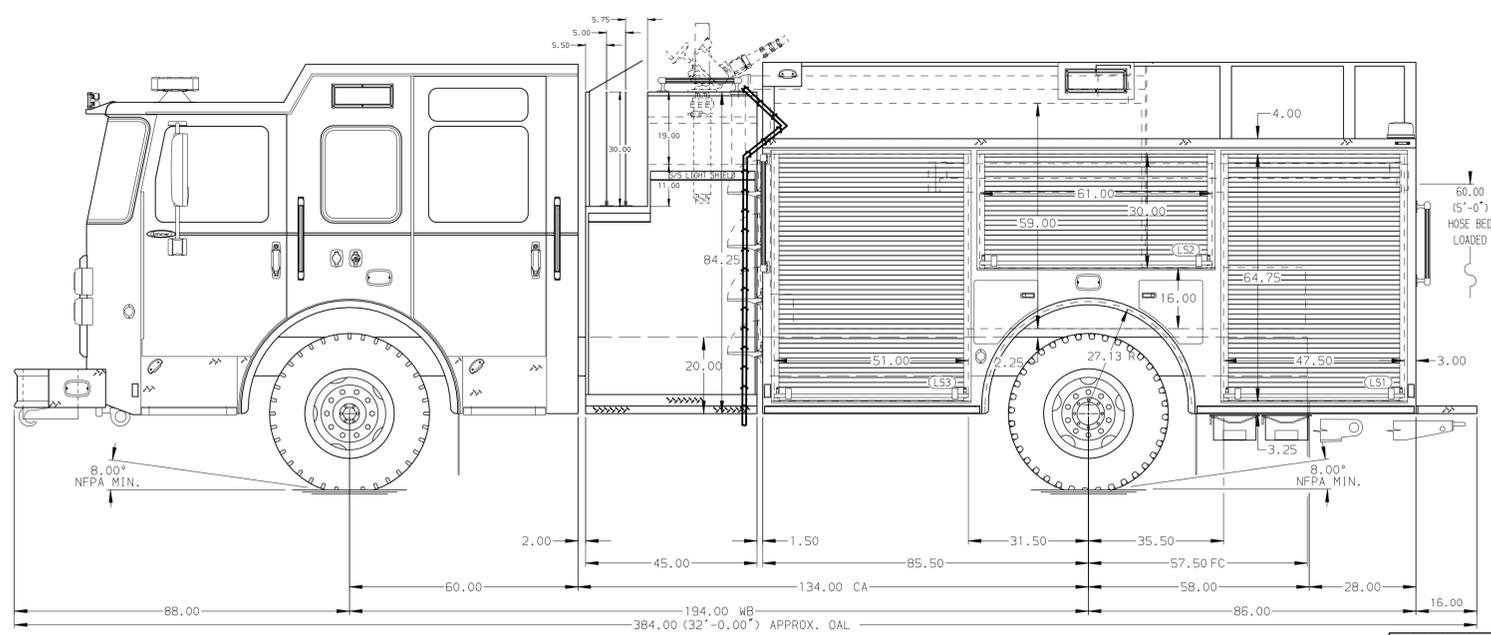

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH KUSSMAUL AIR EJECT LOCATED ON THE DRIVER SIDE CAB
- BATTERY CHARGER LOCATED PER ORDER
- SIX ADJUSTABLE SHELVES LOCATED PER ORDER
- FOUR FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
CHASSIS DATA	TITLE	Pierce Pumper Approval Packet	
MAKE	FOR	Town of Morris CT	
PIERCE			
MODEL	DWG NO.	39166AD-SH1	
ENFORCER			

Pierce MANUFACTURING INC.		JOB NO.	39166
SCALE	1:24	DATE	
DRAWN BY	WRE	CHECKED BY	
SHEET SIZE	D	SHEET NO.	1 OF 2