

PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM

22,800 lb TAK-4 Axle

AXLE, REAR

24,000 lb Meritor Axle

ENGINE

470 HP DD13 Engine

TRANSMISSION

Allison 5th Gen, 4000 EVS P

BUMPER

19" Extended Steel Painted

CAB

7010 Enforcer Cab

BODY WATER TANK

500 Gallon Water Tank

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt

COMPT, PUMPER, DRIVER SIDE

152" RollUp Full Height Front & Rear FDLR

COMPT, PUMPER PASS. SIDE

152" RollUp Full Height Front & Rear FDLR

FIRE SUPPRESSION PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CMU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

Speedlays Not Required

GENERATOR

Generator Not Required

Foam System

Foam System Not Required




Foam Cell

Foam Cell Not Required



Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPIWELL
3. BATTERY CHARGER LOCATED BEHIND DRIVERS SEAT
4. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF THE CAB
5. FIVE ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
6. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
7. ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER
8. HANNAY BOOSTER REEL MODEL SBEP24-23-24 LOCATED IN CARGO AREA FOR 150' OF 0.75" BOOSTER HOSE
9. AUTOMATIC TIRE CHAINS

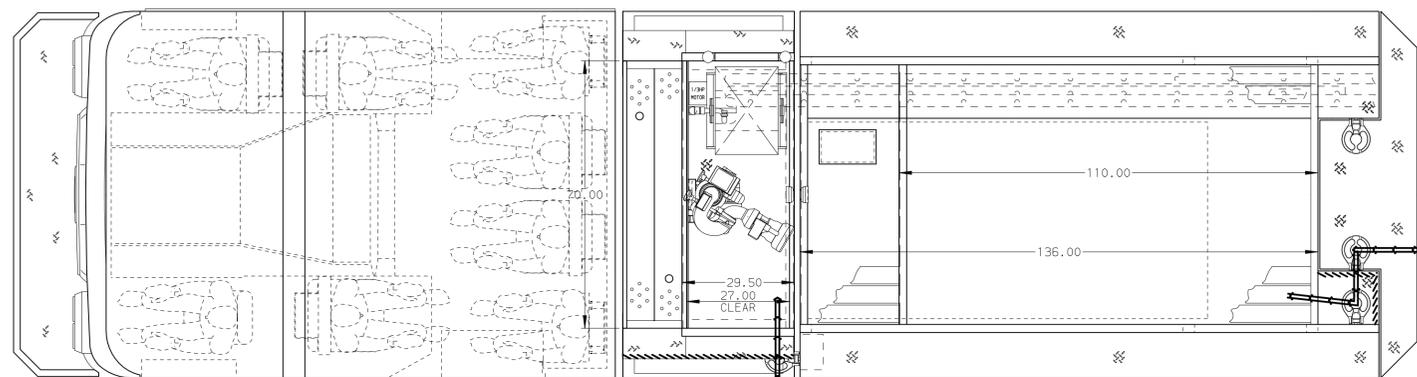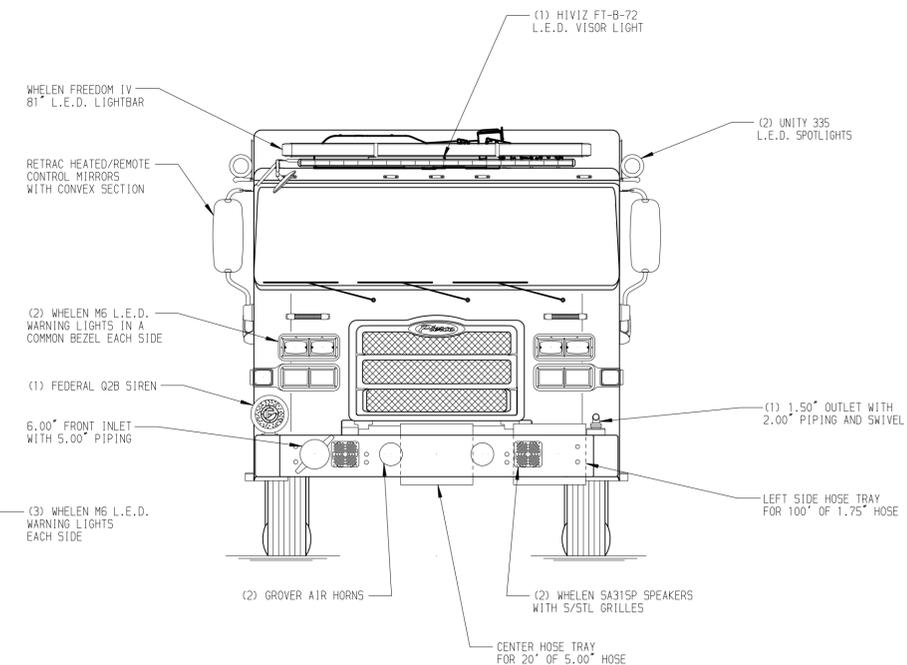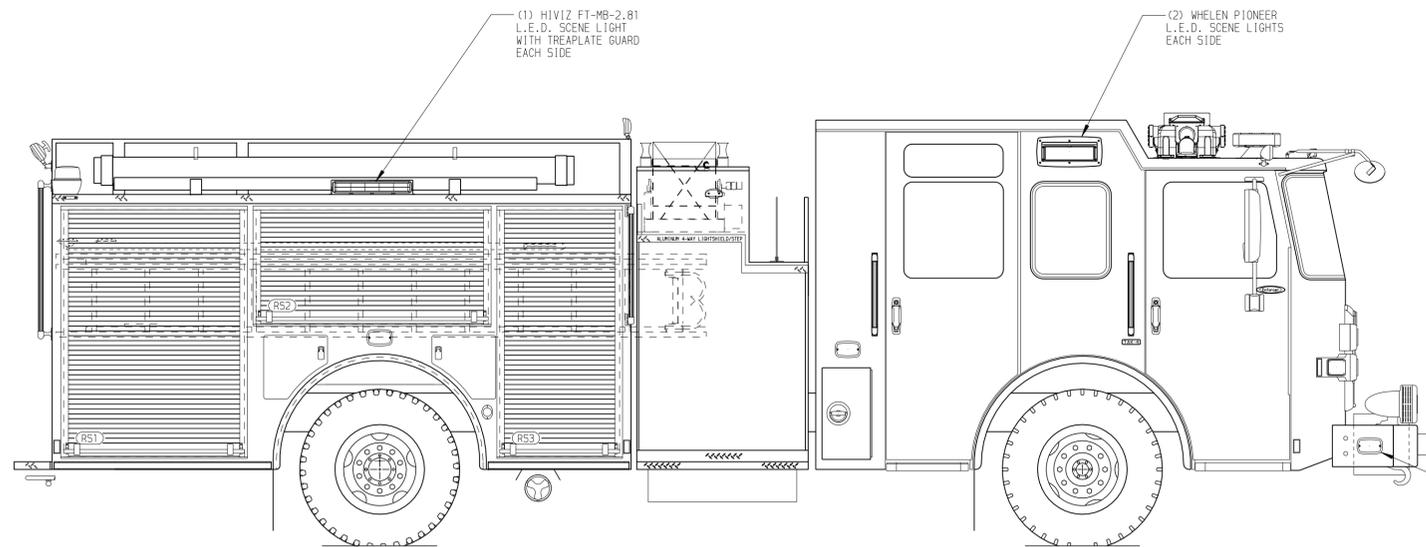

HOSEBED CAPACITY	
BED 1	700' OF 2.50" D.J. POLY HOSE
BED 2	1200' OF 5.00" D.J. POLY HOSE
BED 3	500' OF 1.75" D.J. POLY HOSE

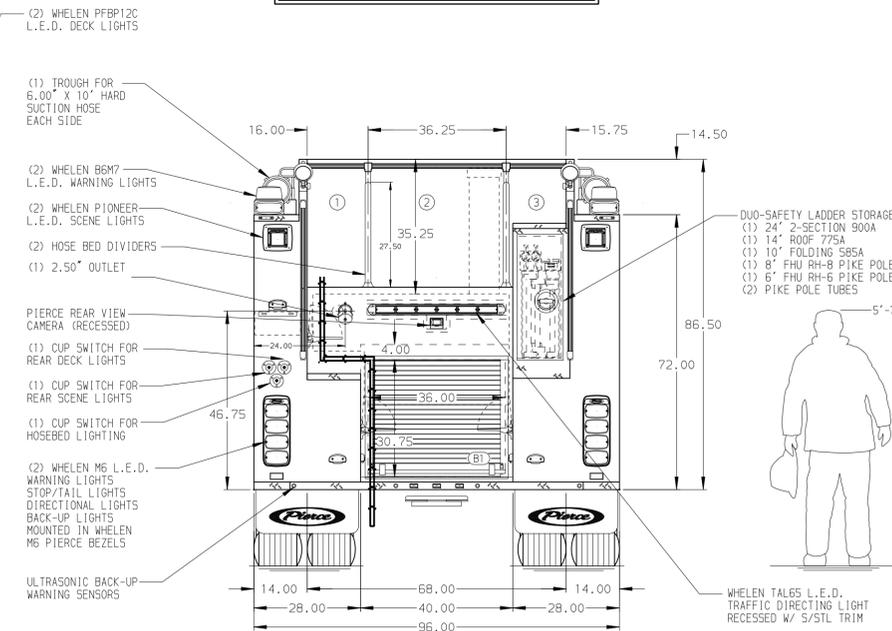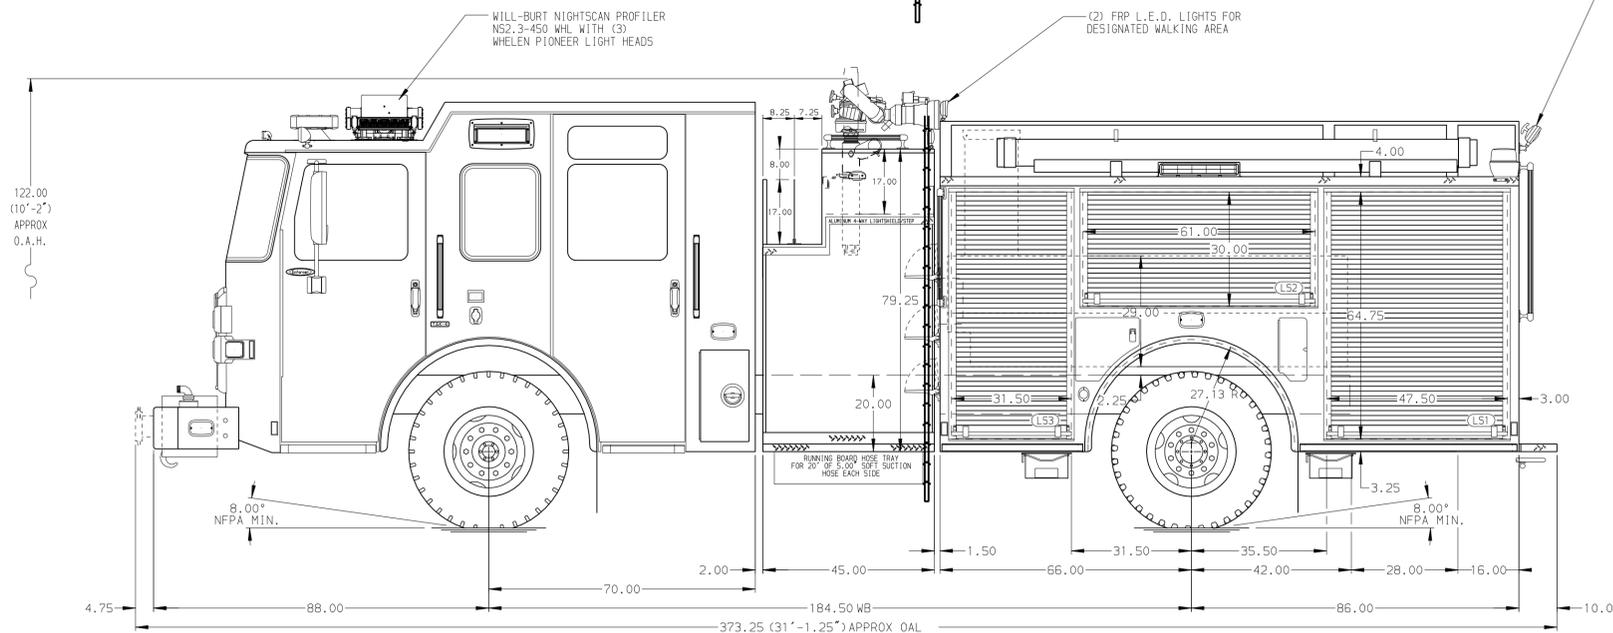

MAXIMUM O.A.L. - 384.00"

		JOB NO.	33072
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	COL
FOR	Village of Port Chester	CHECKED BY	KBO
DWG NO.	33072AD	SHEET SIZE	D
REV	240CT18	BY	COL
CH	-	CH	-
ENFORCER		SHEET NO.	1 OF 1