


WHELEN M6 L.E.D. STABILIZER
WARNING LIGHT EACH SIDE

(3) SPECIAL DOUBLE AIR
BOTTLE COMPARTMENTS
14.00" W x 7.50" H x 26.00" D

(1) FRP L.E.D. FLOODLIGHT
FOR DESIGNATED WALKWAY

STIRRUP STEP
WITH GRIP PATTERN

SURFACE DESIGNATION AND
PATHWAY MARKINGS

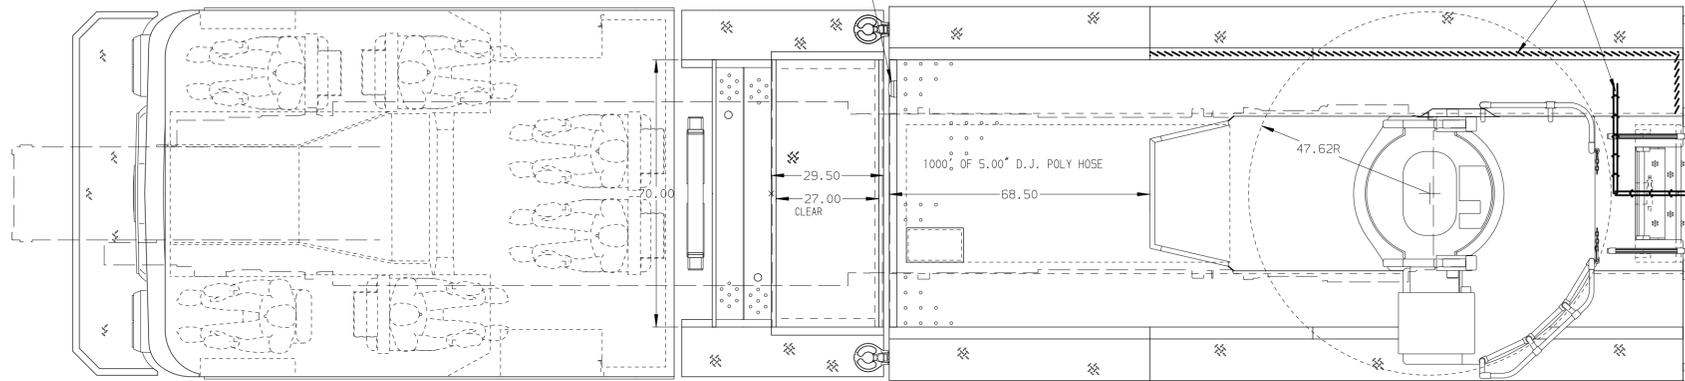

(2) WHELEN FREEDOM IV
21.50" L.E.D. LIGHTBARS

RETRACT HEATED/REMOTE CONTROL
MIRRORS WITH CONVEX SECTION

(1) WHELEN 600TAR
L.E.D. DIRECTIONAL LIGHT
AND (1) WHELEN M6 L.E.D.
WARNING LIGHT IN A
COMMON BEZEL EACH SIDE

MOUNTING PROVISIONS FOR
FRONT INLET


(2) WHELEN M6 L.E.D.
WARNING LIGHTS
EACH SIDE

(2) GROVER AIR HORNS

(1) FEDERAL BP200-Q SPEAKER

CENTER HOSE TRAY
FOR 125' OF 1.75" HOSE

<p>BODY</p> <p>75' HAL Aluminum Body</p> <p>COMPT, LEFT SIDE FRONT Full Height RollUp Forward</p> <p>COMPT, LEFT SIDE REAR Full Height RollUp Rearward</p> <p>COMPT, RIGHT SIDE FRONT Full Height RollUp Forward</p> <p>COMPT, RIGHT SIDE REAR Full Height RollUp Rearward</p>	<p>WATER TANK</p> <p>500 Gallon Poly Water Tank</p> <p>Foam System Plumbing for Future Husky Foam System</p> <p>Foam Cell Foam Cell Not Required</p>
---	---

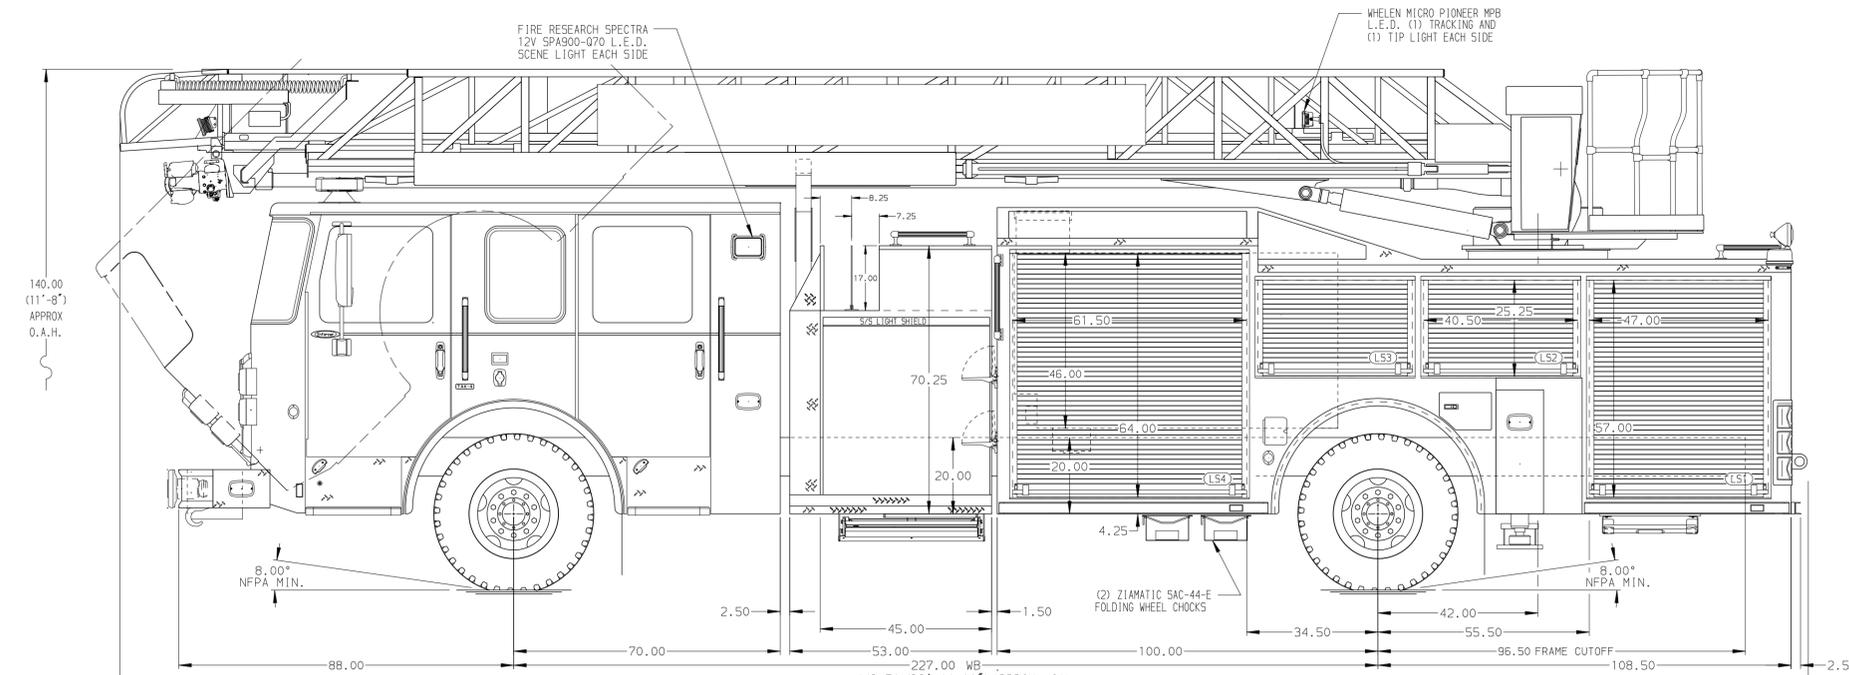

FIRE RESEARCH SPECTRA
12V SPA900-Q70 L.E.D.
SCENE LIGHT EACH SIDE

WHELEN MICRO PIONEER MPB
L.E.D. (1) TRACKING AND
(1) TIP LIGHT EACH SIDE

140.00
(11'-8")
APPROX
O.A.H.

8.00"
NFPA MIN.

(2) ZIAMATIC SAC-44-E
FOLDING WHEEL CHOCKS

8.00"
NFPA MIN.



(2) UNITY A6 DECK LIGHTS

(2) WHELEN L31HRFN
L.E.D. WARNING LIGHTS

LONG ITEM STORAGE
ONE 24' 2-SEC 900
TWO 16' ROOF B75
TWO PIKE POLES

(2) WRAP AROUND L.E.D. LIGHT
SETS WITH STOP/TAIL, BACK UP
AND DIRECTIONAL LIGHTS
IN A COMMON BEZEL

(2) WHELEN M6 L.E.D.
WARNING LIGHTS

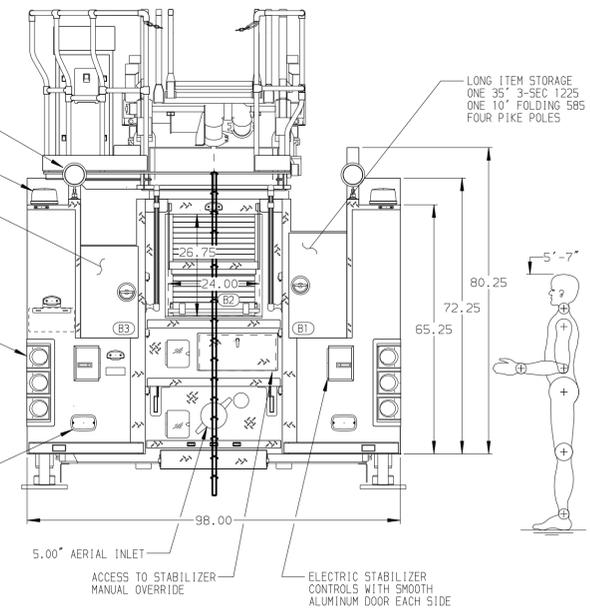

<p>CHASSIS</p> <p>Enforcer Chassis</p> <p>ENGINE</p> <p>400 HP Cummins L9 Engine</p>	<p>CAB</p> <p>7000 Enforcer Cab</p> <p>BUMPER</p> <p>19" Extended Stainless Steel</p>	<p>AXLE, FRONT, CUSTOM</p> <p>19,500 Lb TAK-4 Axle</p> <p>AXLE, REAR</p> <p>33,500 Lb Meritor Axle</p>	<p>TRANSMISSION</p> <p>Allison 5th Gen, 3000 EV5 P</p>	<p>PUMPHOUSE</p> <p>45" Control Zone Side Mount</p> <p>PUMP</p> <p>1500 GPM Waterous CSU</p>	<p>CROSSLAYS, 1.50"</p> <p>(2) 1.50" Standard Capacity</p> <p>CROSSLAYS, 2.50"</p> <p>2.50" Crosslay Not Required</p>	<p>SPEEDLAYS</p> <p>Speedlays Not Required</p> <p>GENERATOR</p> <p>Generator Not Required</p>	<p>CUSTOMER APPROVAL</p> <p>APPROVED BY: _____</p> <p>DATE: _____</p>	<p>Pierce MANUFACTURING INC.</p>	<p>JOB NO. 33584</p> <p>SCALE 1:24</p> <p>DATE</p>
<p>NOTE</p> <p>DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.</p>	<p>1. ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY</p> <p>2. SHORELINE RECEPTACLE WITH KUSSMALL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB</p> <p>3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL</p> <p>4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER</p> <p>5. BATTERY CHARGE INDICATOR LOCATED PER SHOP ORDER</p> <p>6. FOUR ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER</p> <p>7. 7.00" AERIAL LIMITED RETRACTION</p> <p>8. 1.50" RAISED AERIAL PEDESTAL</p> <p>9. 1500 GPM HIGH FLOW WATERWAY</p> <p>10. TRIDENT FOLDING STEPS ON AERIAL DEVICE</p>	<p>CHASSIS DATA</p> <p>MAKE</p> <p>PIERCE</p> <p>MODEL</p>	<p>TITLE</p> <p>75 AERIAL LADDER & BODY ASSEMBLY</p> <p>FOR</p> <p>PIERCE FIELD UNIT APPLETON, WI</p> <p>DWG NO.</p> <p>33584AD</p>	<p>DRAWN BY</p> <p>LWE</p> <p>CHECKED BY</p> <p>THS</p> <p>SHEET SIZE</p> <p>D</p> <p>SHEET NO.</p> <p>1 OF 1</p>					