


122.00
(10'-2")
APPROX
O.A.H.


(4) DOUBLE AIR BOTTLE COMPARTMENTS WITH STAINLESS STEEL DOOR (2) P5 (2) D5
WELDON 9186-8580-29 L.E.D. DIRECTIONAL/MARKER LIGHT EACH SIDE

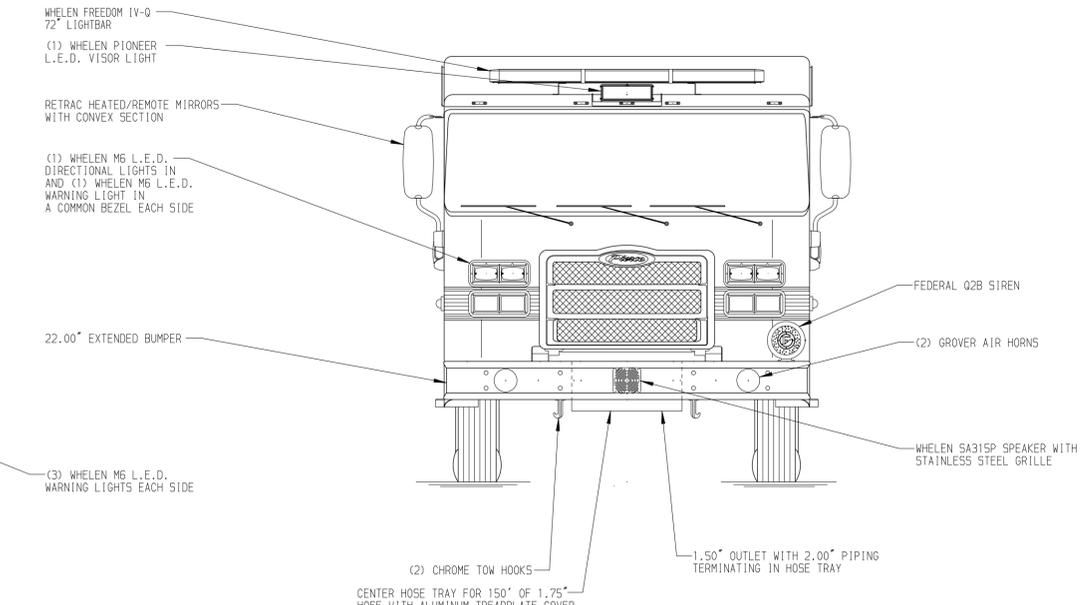

WHELEN FREEDOM IV-0 72" LIGHTBAR
(1) WHELEN PIONEER L.E.D. VISOR LIGHT
RETRAC HEATED/REMOTE MIRRORS WITH CONVEX SECTION
(1) WHELEN M6 L.E.D. DIRECTIONAL LIGHTS IN AND (1) WHELEN M6 L.E.D. WARNING LIGHT IN A COMMON BEZEL EACH SIDE
22.00" EXTENDED BUMPER
(3) WHELEN M6 L.E.D. WARNING LIGHTS EACH SIDE

FEDERAL Q2B SIREN
(2) GROVER AIR HORNS
WHELEN SA31SP SPEAKER WITH STAINLESS STEEL GRILLE

(2) CHROME TOW HOOKS
1.50" OUTLET WITH 2.00" PIPING TERMINATING IN HOSE TRAY
CENTER HOSE TRAY FOR 150' OF 1.75" HOSE WITH ALUMINUM TREADPLATE COVER

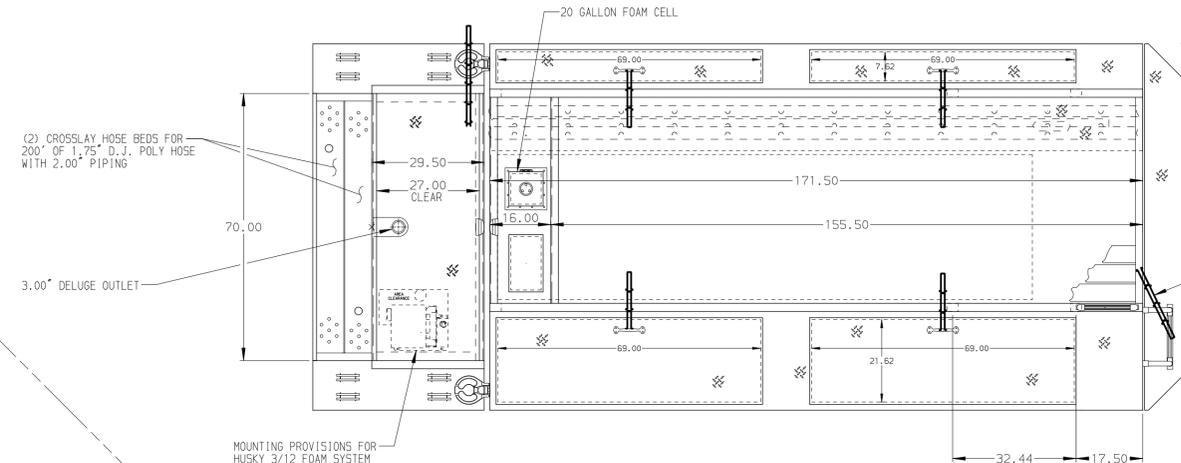

(2) CROSSLAY HOSE BEDS FOR 200' OF 1.75" D.J. POLY HOSE WITH 2.00" PIPING


3.00" DELUGE OUTLET

MOUNTING PROVISIONS FOR HUSKY 3/12 FOAM SYSTEM

20 GALLON FOAM CELL

SURFACE DESIGNATION AND PATHWAY MARKINGS

HOSEBED CAPACITIES
① 300' OF 2.50" D.J. POLY HOSE
② 1000' OF 5.00" D.J. POLY HOSE
③ 300' OF 2.50" D.J. POLY HOSE

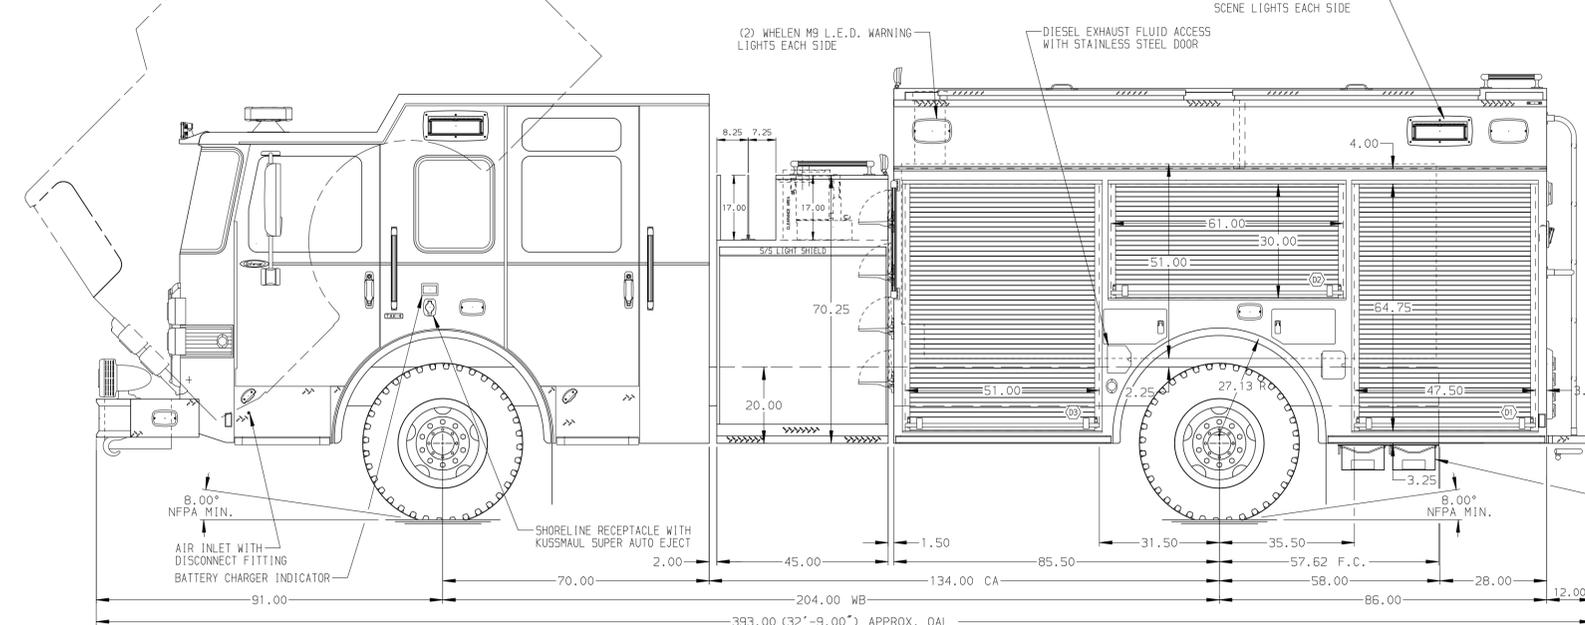

8.00" NFPA MIN.

AIR INLET WITH DISCONNECT FITTING BATTERY CHARGER INDICATOR

SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO EJECT

(2) WHELEN M9 L.E.D. WARNING LIGHTS EACH SIDE

DIESEL EXHAUST FLUID ACCESS WITH STAINLESS STEEL DOOR

(2) WHELEN PIONEER L.E.D. SCENE LIGHTS EACH SIDE

(2) 0.25" HOSE BED DIVIDERS

WHELEN TAL65 L.E.D. TRAFFIC DIRECTING LIGHT RECESSED WITH STAINLESS STEEL TRIM

PIERCE CW13469CA1 BACK UP CAMERA

(2) WHELEN M9 L.E.D. WARNING LIGHTS

2.50" OUTLET WITH 2.50" PIPING

(2) WHELEN MICRO PIONEER MPRIS L.E.D. LIGHTS

SWITCH FOR REAR LIGHTS

SWITCH FOR HOSE BED LIGHTS

(2) WHELEN M6 L.E.D. WARNING LIGHTS


(2) WHELEN M6 L.E.D. STOP/TAIL LIGHTS

(2) WHELEN M6 L.E.D. DIRECTIONAL LIGHTS


(2) WHELEN M6 L.E.D. BACK-UP LIGHTS

ALL LIGHTS MOUNTED IN WHELEN M6 "PIERCE" BEZEL

(2) ZIAMATIC SAC-44-E FOLDING WHEEL CHOCKS

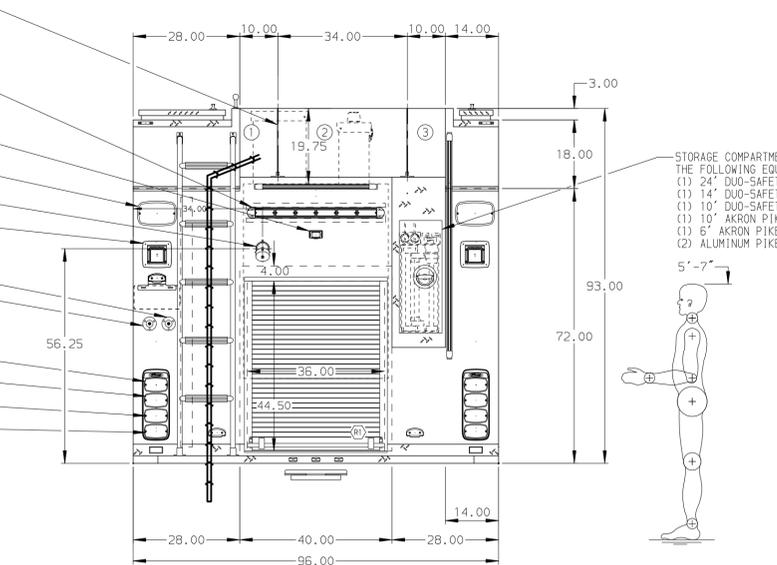

STORAGE COMPARTMENT TO CONTAIN THE FOLLOWING EQUIPMENT:
(1) 24" DUO-SAFETY 2-SEC 900-A
(1) 14" DUO-SAFETY ROOF 775-A
(1) 10" DUO-SAFETY FOLDING 585-A
(1) 10' AKRON PIKE POLE
(1) 6' AKRON PIKE POLE
(2) ALUMINUM PIKE POLE TUBES



ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
- FULL WIDTH/DEPTH ADJUSTABLE SHELVES WITH 2" SIDES IN COMPARTMENT-D1,D3,P1,P2,P3,R1
- SWING-OUT TOOLBOARD IN COMPARTMENT-D2
- FLOOR MOUNTED SLIDE-OUT TRAYS WITH 2" SIDES IN COMPARTMENT-D1,D3,P1,P3

		JOB NO.	31692		
		SCALE	DATE		
CHASSIS DATA MAKE PIERCE MODEL ENFORCER	TITLE	1500-D-1000P W/20 GAL. FOAM CELL;DELUGE; (2) X-LAYS 171" PUMPER BODY;LADDERS BETWEEN TANK AND BODY	DRAWN BY	COL	14JUL17
	FOR	PIERCE FIELD UNIT APPLETON, WI	CHECKED BY	THS	14JUL17
REV	DATE	BY	CH	DWG NO.	SHEET NO.
				31692AD	D
					1 OF 1